


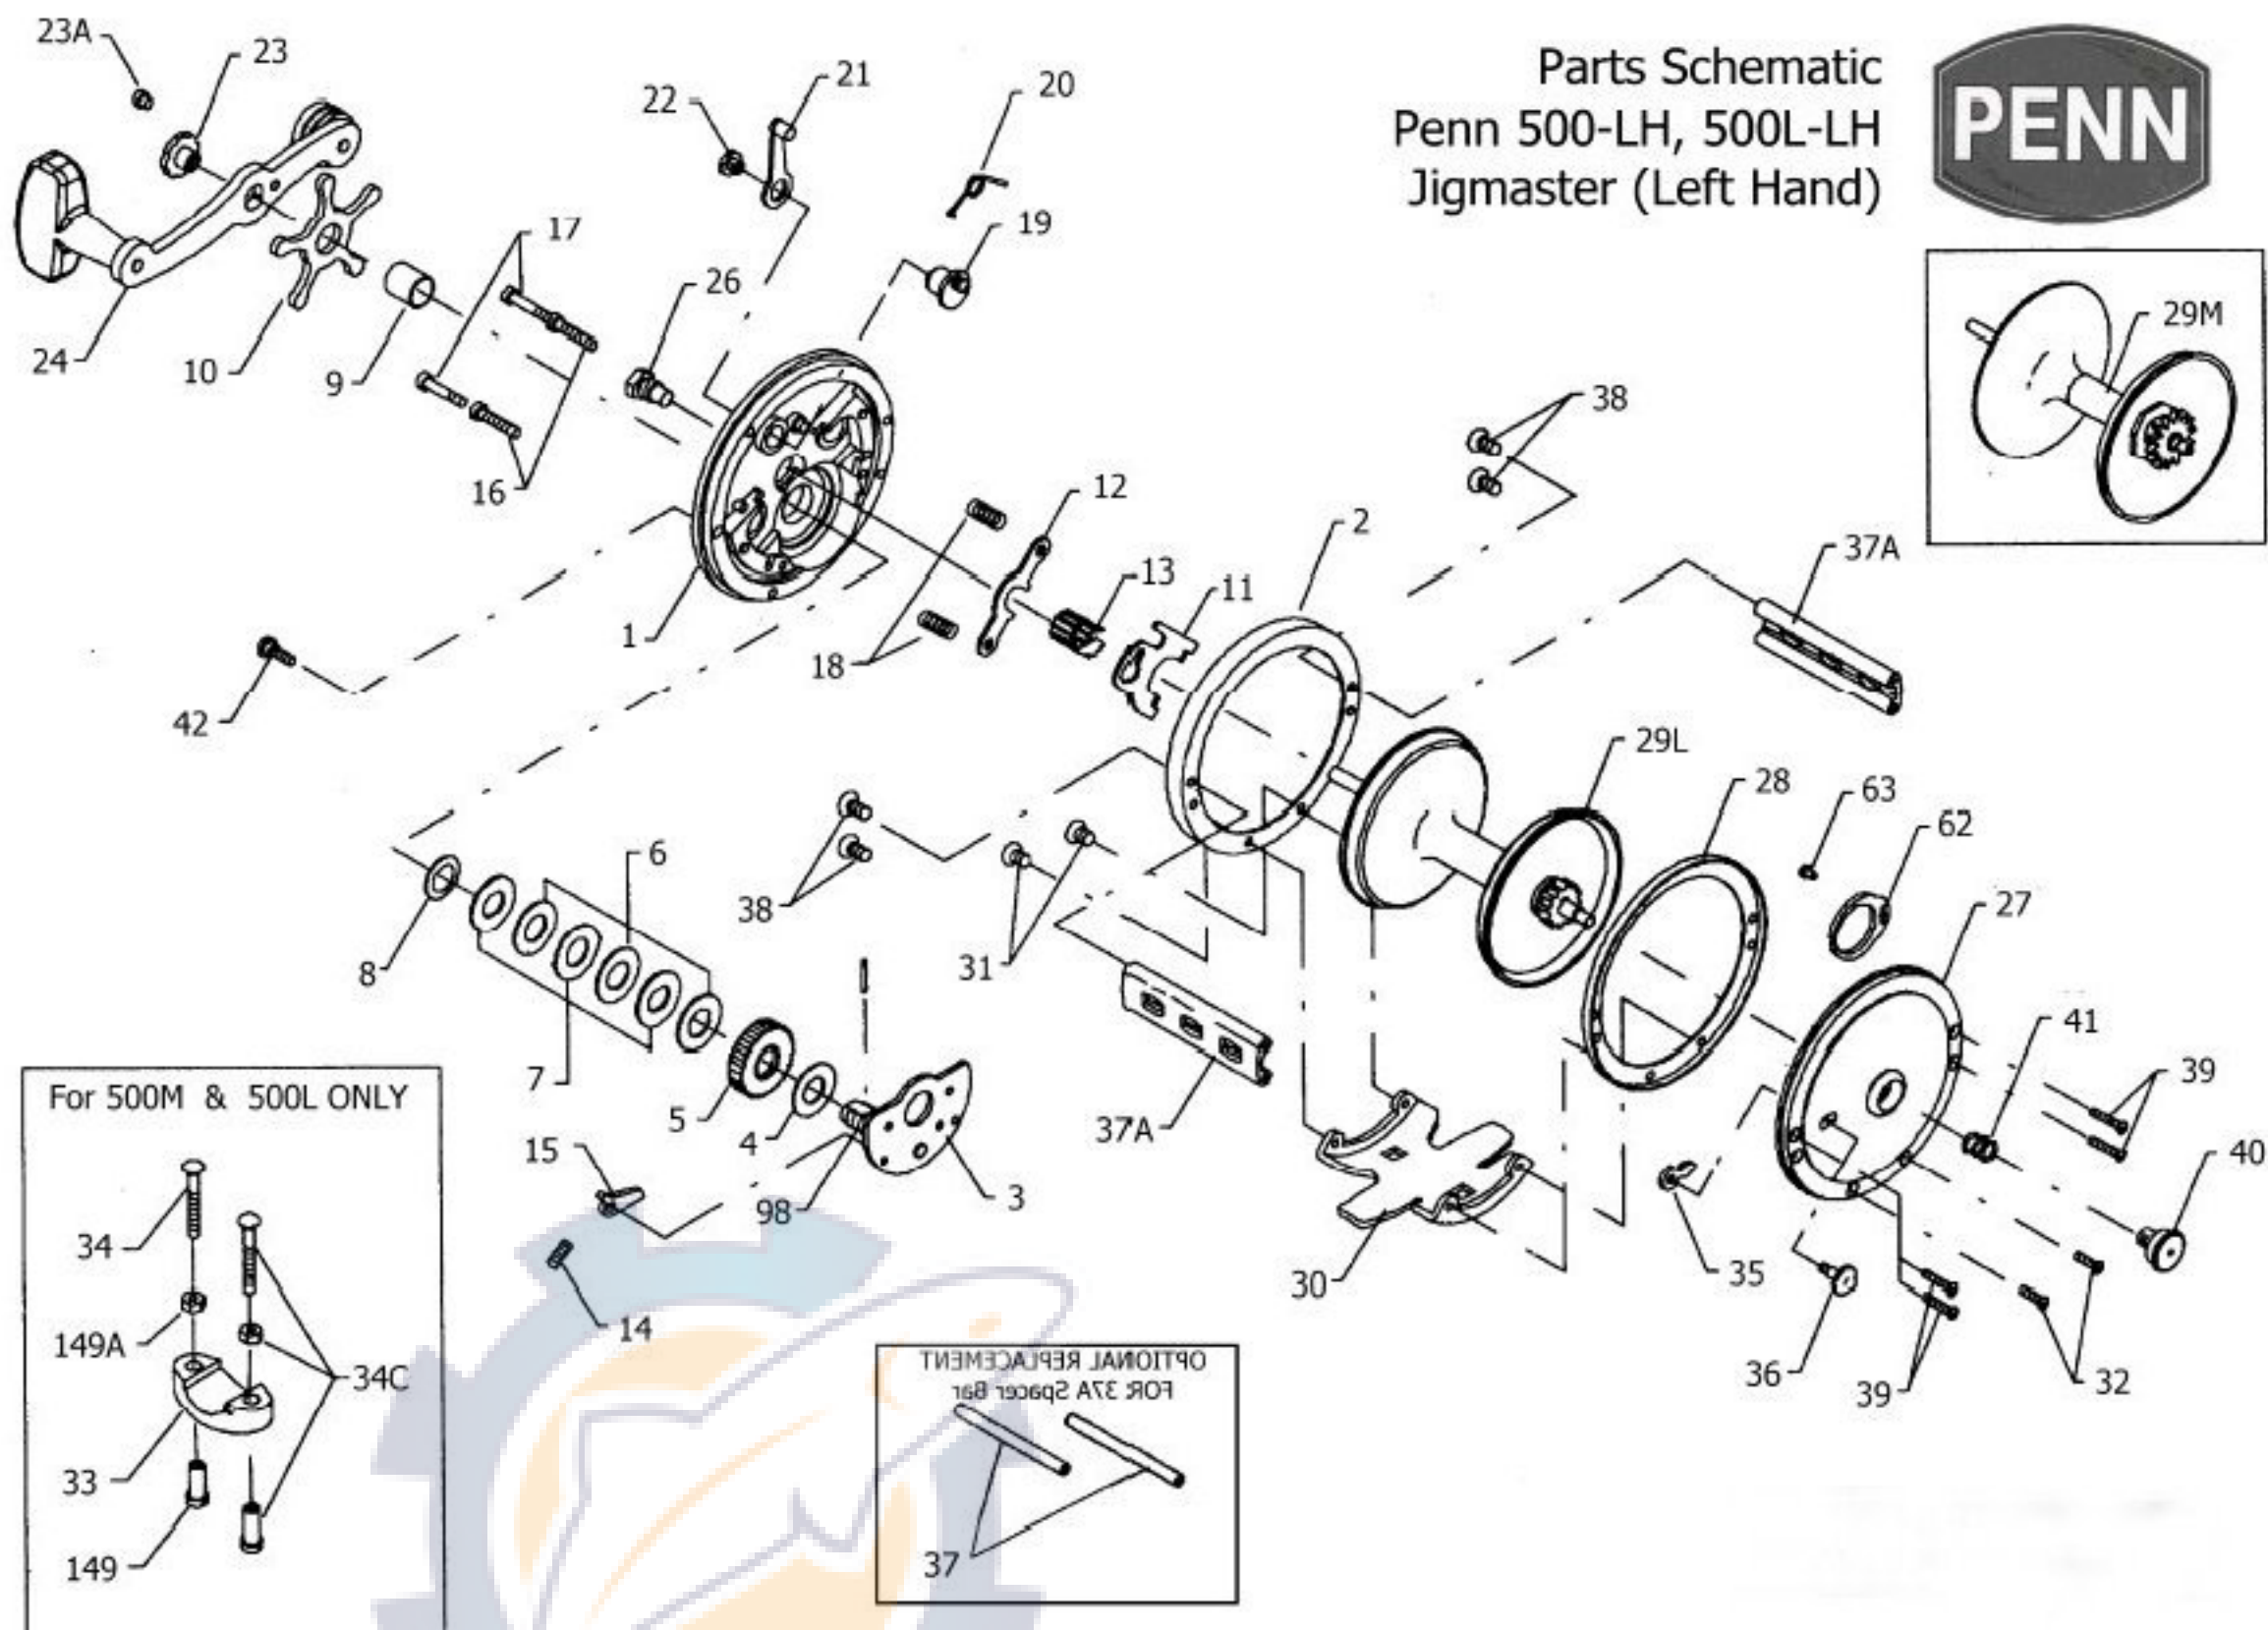

### Penn Reel Parts list for:

Model: 500-LH, 500L-LH Jigmaster LEFT HAND Versior

| KEY NO | PART NO. | DESCRIPTION                          | KEY NO | PART NO. | DESCRIPTION                          |
|--------|----------|--------------------------------------|--------|----------|--------------------------------------|
| 1      | 1-500    | LEFT SIDE PLATE (BLACK)              | 27     | 27-500   | RIGHT SIDE PLATE (BLACK)             |
| 2      | 2-250    | RIGHT SIDE RING (OUTER)              | 28     | 28-250   | RIGHT SIDE RING (INNER)              |
| 3      | 3-500LH  | BRIDGE W/ SLEEVE (LEFT HAND VERSION) | 29L    | 29L-500  | SPOOL                                |
| 4      | 4-60     | FIBER WASHER                         | 29M    | 29M-250  | SPOOL (optional)                     |
| 5      | 5-500LH  | MAIN GEAR (LEFT HAND VERSION)        | 30     | 30-200   | STAND                                |
| 6      | 6-309    | DRAG WASHER (3 REQ.)                 | 31     | 31-19    | LEFT SIDE STAND SCREW (2 REQ.)       |
| 7      | 7C-500   | METAL WASHER SET                     | 32     | 32-16CH  | RIGHT SIDE STAND SCREW               |
| 8      | 8-60     | TENSION SPRING                       | 33     | 33-113   | ROD CLAMP (GRAPHITE)                 |
| 9      | 9-60     | SPACING SLEEVE                       | *      | 33R-200  | METAL RINGED ROD CLAMP (OPTIONAL)    |
| 10     | 10-60LH  | STAR DRAG WHEEL (LEFT HAND VERSION)  | 34     | 34-45    | CLAMP SCREW                          |
| 11     | 11-99    | ECCENTRIC JACK                       | 34C    | 34C-45   | ROD CLAMP SCREW W/ NUTS F/GRAPHITE   |
| 12     | 12-500   | PINION YOKE                          | 35     | 35-60    | CLICK TOUNGE                         |
| 13     | 13-500LH | PINION GEAR (LEFT HAND VERSION)      | 36     | 36-60CH  | CLICK BUTTON                         |
| 14     | 14-500   | DOG SPRING                           | 37     | 37-155   | POSTS (OPTIONAL - 4 REQ.)            |
| 15     | 15-500   | DOG                                  |        |          | CAN USE TWO 37'S IN PLACE OF ONE 37A |
| 16     | 16-60CH  | LOWER BRIDGE SCREW                   | 37A    | 37A-500S | SPACER BAR (2 REQ.)                  |
| 17     | 17-60CH  | UPPER BRIDGE SCREW                   | 38     | 38-7     | R.S. SPACER SCREW (4 REQ.)           |
| 18     | 18-60    | CLUTCH SPRING                        | 39     | 39-5     | J.S. SPACER SCREW (4 REQ.)           |
| 19     | 19-250   | ECCENTRIC                            | 40     | 40-60    | RIGHT SIDE BEARING                   |
| 20     | 20-60L   | ECCENTRIC SPRING                     | 41     | 41-80    | BEARING SPRING                       |
| 21     | 21-66    | ECCENTRIC LEVER                      | 42     | 129-200  | TAKE APART THUMB SCREW               |
| 22     | 22-99    | ECCENTRIC SCREW                      | 62     | 62-309   | CLICK SPRING                         |
| 23     | 23-60    | HANDLE SCREW                         | 63     | 63-209   | CLICK SPRING SCREW                   |
| 23A    | 110-60   | HANDLE LOCK SCREW                    | 98     | 98-60LH  | GEAR SLEEVE (LEFT HAND VERSION)      |
| 24     | 24-66    | HANDLE                               | 149    | 149-45   | CLAMP NUT (2 REQ.) F/GRAPHITE        |
| 26     | 26-155   | LEFT SIDE BEARING                    | 149A   | 149-200  | HEX NUT (2 REQ.) EITHER CLAMP        |
|        |          |                                      | *      | 152-200  | WINGED NUT F/METAL CLAMP             |

\* Not Shown