



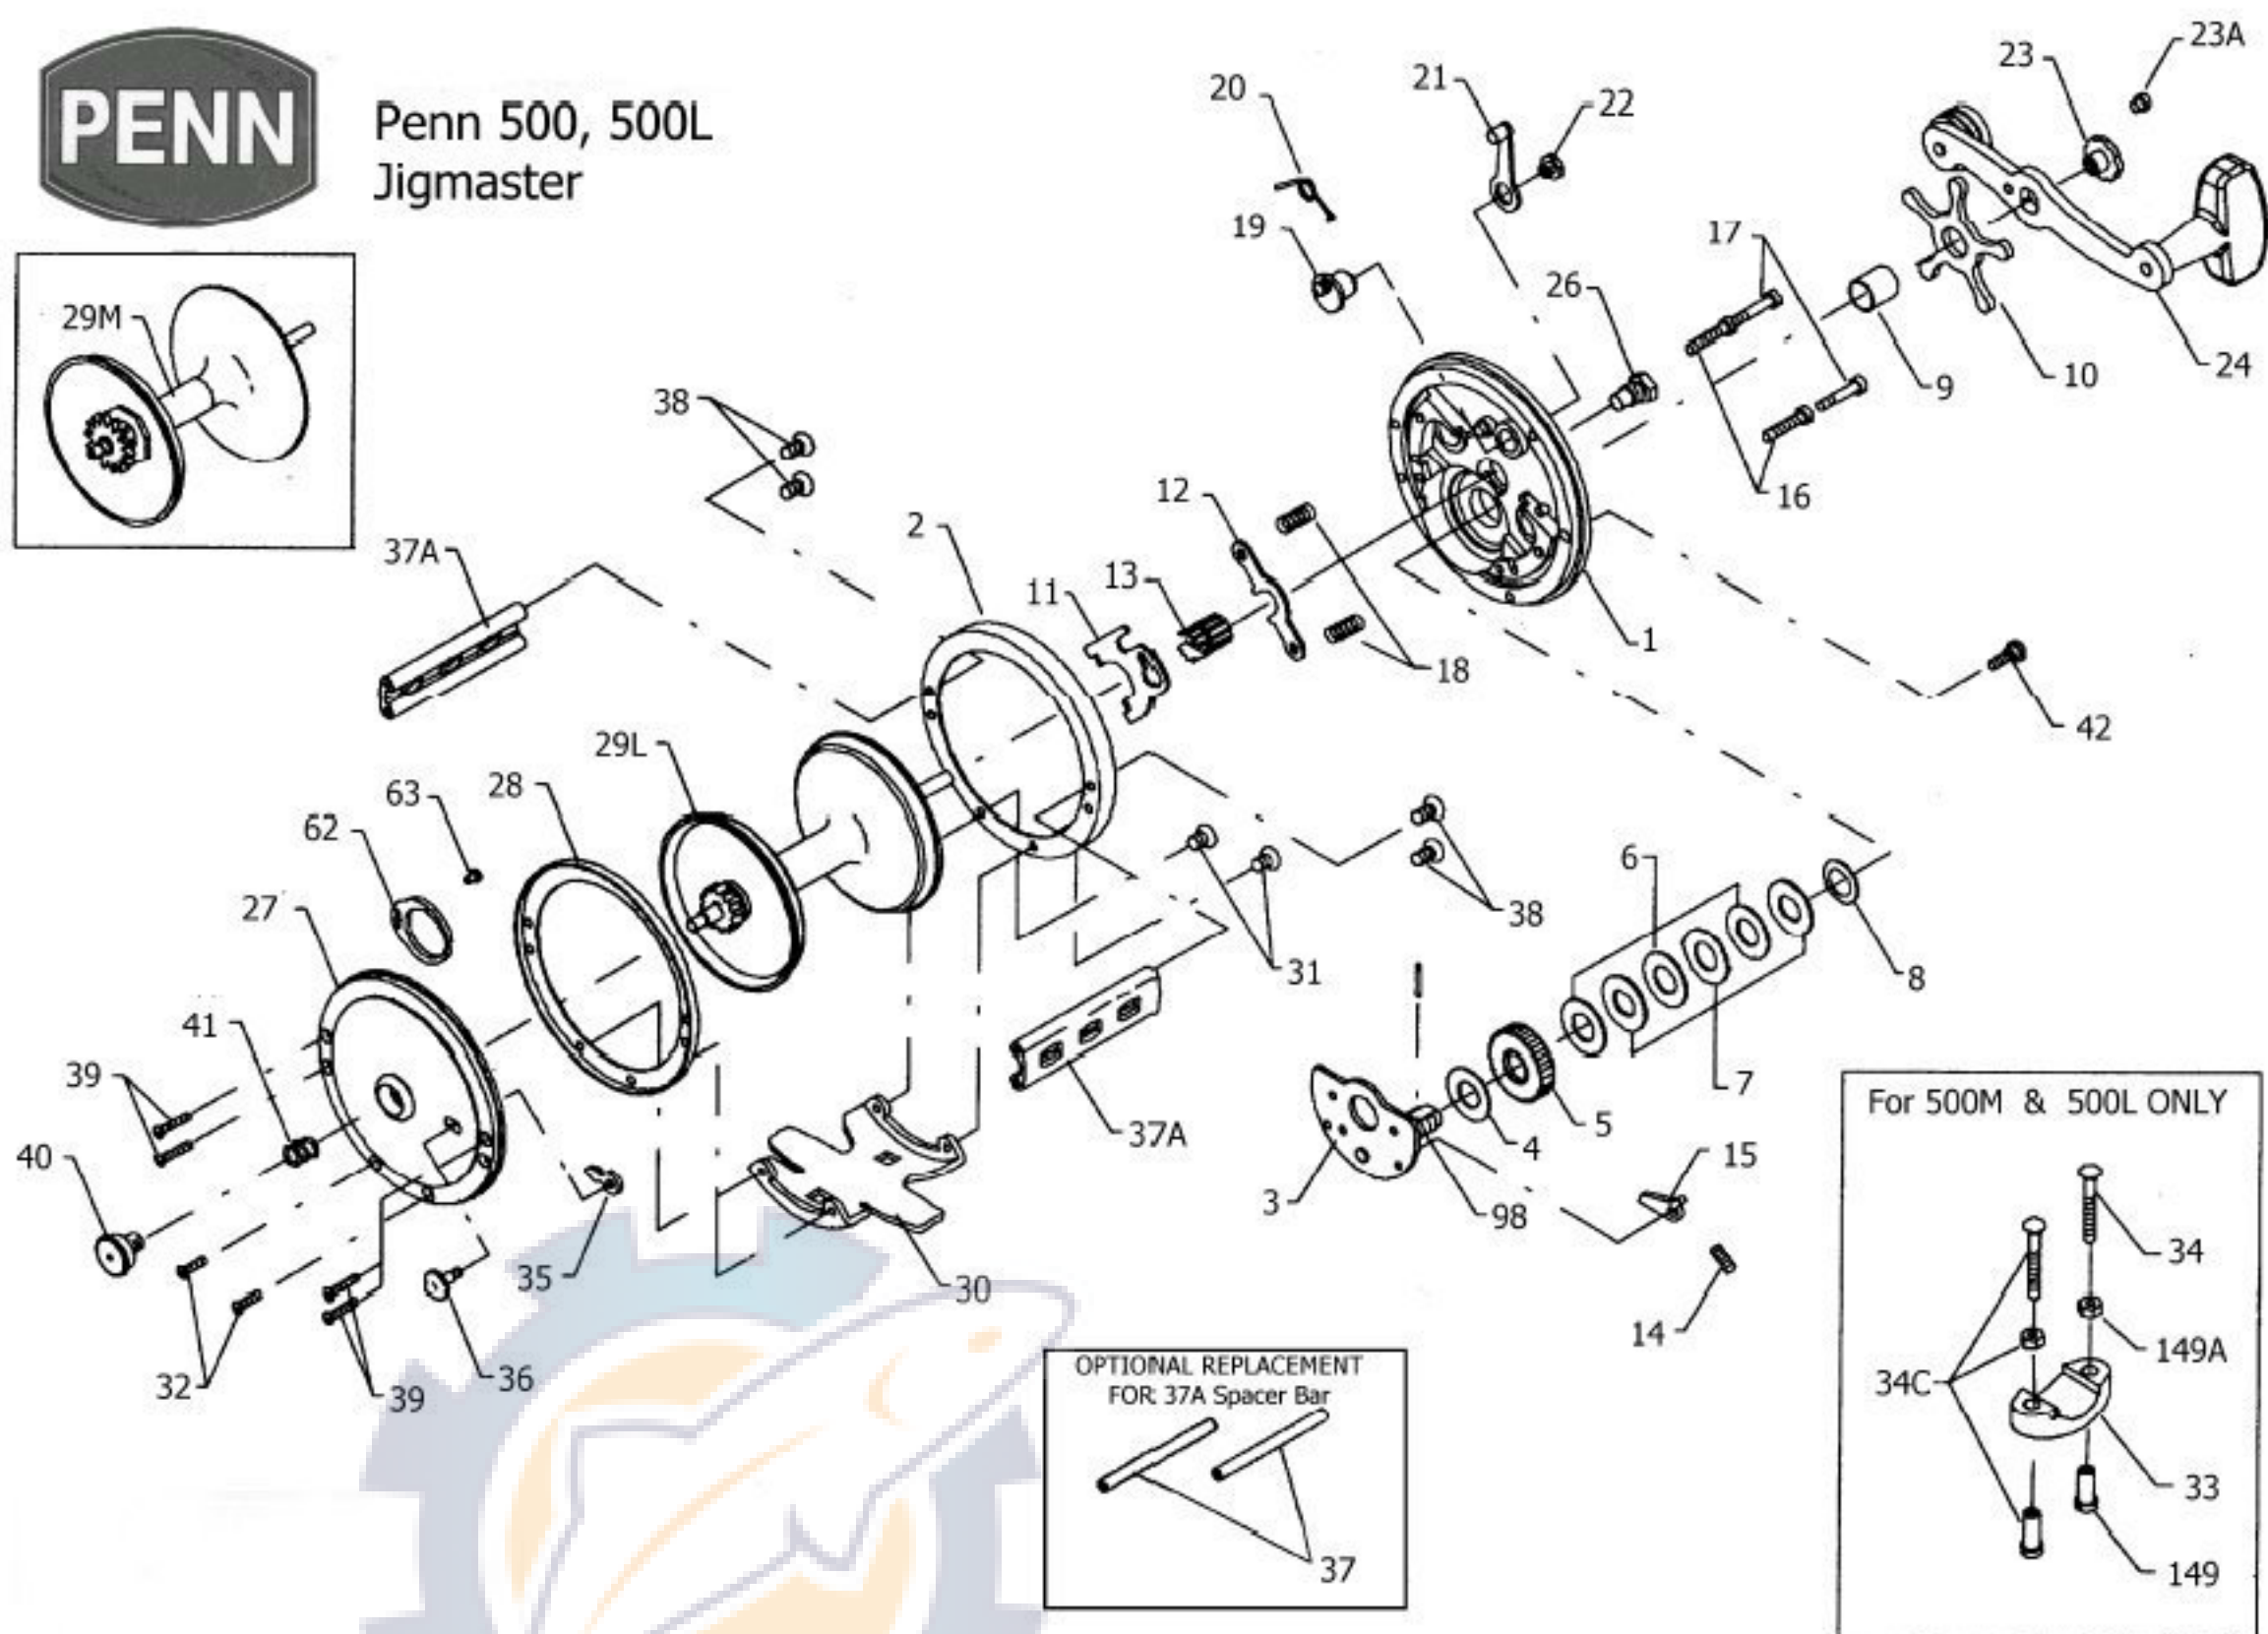

# Penn 500, 500L Jigmaster

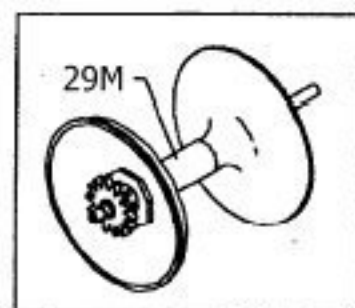

## Penn Reel Parts list for:

## Model: 500 Jigmaster

| KEY NO. | PART NO.  | DESCRIPTION              | KEY NO. | PART NO.   | DESCRIPTION                          |
|---------|-----------|--------------------------|---------|------------|--------------------------------------|
| 1       | 1-500     | RIGHT SIDE PLATE (BLACK) | 27      | 27-500     | LEFT SIDE PLATE (BLACK)              |
| 2       | 2-250     | LEFT SIDE RING           | 28      | 28-250     | L.S. RING (INNER)                    |
| 3       | 3-500S**  | BRIDGE W/ SLEEVE         | 29L     | 29L-500    | SPOOL                                |
| 4       | 4-60      | FIBER WASHER             | 29M     | 29M-250    | SPOOL (optional)                     |
| 5       | 5-500     | MAIN GEAR                | 30      | 30-200     | STAND                                |
| 6       | 6-309     | DRAG WASHER (3 REQ.)     | 31      | 31-19      | RIGHT SIDE STAND SCREW (2 REQ.)      |
| 7       | 7C-500    | METAL WASHER SET         | 32      | 32-16CH    | LEFT SIDE STAND SCREW                |
| 8       | 8-60      | TENSION SPRING           | 33      | 33-113     | ROD CLAMP (GRAPHITE)                 |
| 9       | 9-60      | SPACING SLEEVE           | *       | 33R-200    | METAL RINGED ROD CLAMP (OPTIONAL)    |
| 10      | 10-505*** | STAR DRAG WHEEL          | 34      | 34-45      | CLAMP SCREW                          |
| 11      | 11-99     | ECCENTRIC JACK           | 34C     | 34C-45     | ROD CLAMP SCREW W/ NUTS F/GRAPHITE   |
| 12      | 12-500    | PINION YOKE              | 35      | 35-60      | CLICK TOUNGE                         |
| 13      | 13-500    | PINION                   | 36      | 36-60CH    | CLICK BUTTON                         |
| 14      | 14-500    | DOG SPRING               | 37      | 37-155     | POSTS (OPTIONAL - 4 REQ.)            |
| 15      | 15-500    | DOG                      |         |            | CAN USE TWO 37'S IN PLACE OF ONE 37A |
| 16      | 16-60CH   | LOWER BRIDGE SCREW       | 37A     | 37A-500S   | SPACER BAR (2 REQ.)                  |
| 17      | 17-60CH   | UPPER BRIDGE SCREW       | 38      | 38-7       | R.S. SPACER SCREW (4 REQ.)           |
| 18      | 18-60     | CLUTCH SPRING            | 39      | 39-5       | J.S. SPACER SCREW (4 REQ.)           |
| 19      | 19-250    | ECCENTRIC                | 40      | 40-60      | LEFT SIDE BEARING                    |
| 20      | 20-60L    | ECCENTRIC SPRING         | 41      | 41-60      | BEARING SPRING                       |
| 21      | 21-66     | ECCENTRIC LEVER          | 42      | 129-200    | TAKE APART THUMB SCREW               |
| 22      | 22-99     | ECCENTRIC SCREW          | 62      | 62-309     | CLICK SPRING                         |
| 23      | 23-60     | HANDLE SCREW             | 63      | 63-209     | CLICK SPRING SCREW                   |
| 23A     | 110-60    | HANDLE LOCK SCREW        | 98      | 98-505**** | GEAR SLEEVE                          |
| 24      | 24-66     | HANDLE                   | 149     | 149-45     | CLAMP NUT (2 REQ.) F/GRAPHITE        |
| 26      | 26-155    | RIGHT SIDE BEARING       | 149A    | 149-200    | HEX NUT (2 REQ.) EITHER CLAMP        |
|         |           |                          | *       | 152-200    | WINGED NUT F/METAL CLAMP             |

\* Not Shown

\*\* Fine tooth sleeve, older reels take a 3-500 with a coarse tooth sleeve

\*\*\* Fine tooth star drag, older reels take a 10-60 or a 10-140 with a coarse thread

\*\*\*\* Fine tooth gear sleeve, older reels take a 98-60 with a coarse thread