



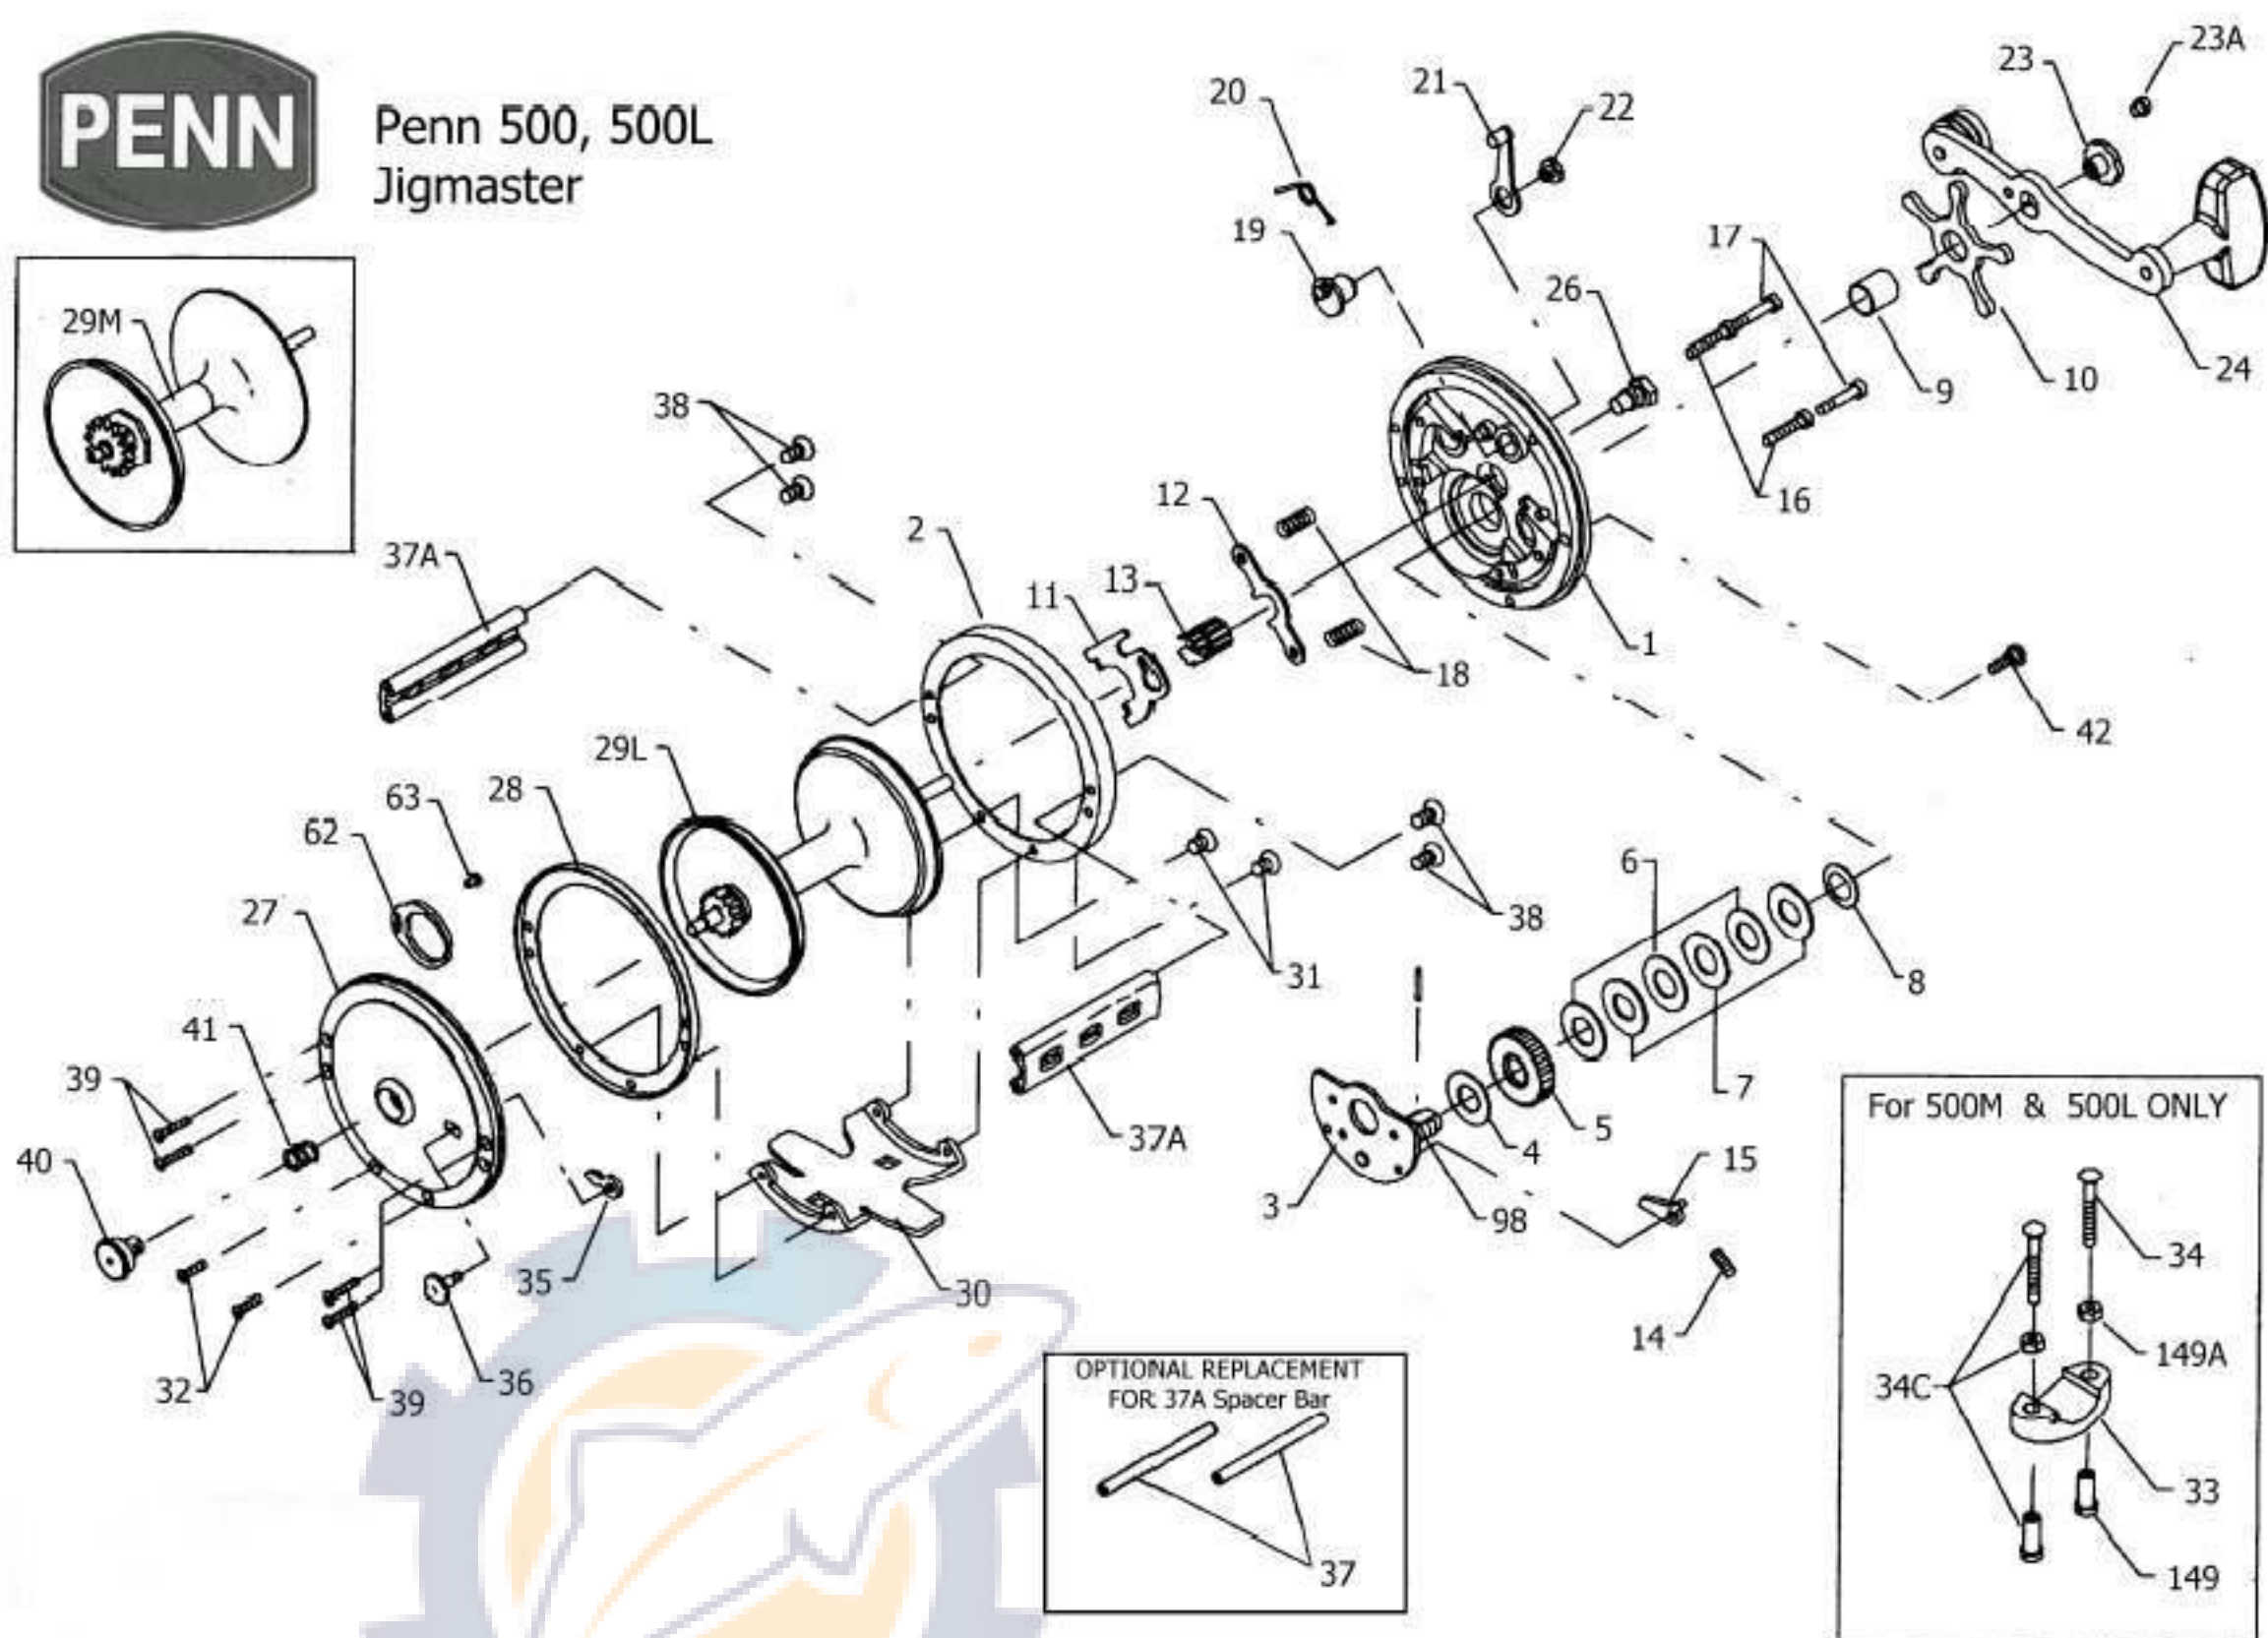

# Penn 500, 500L Jigmaster

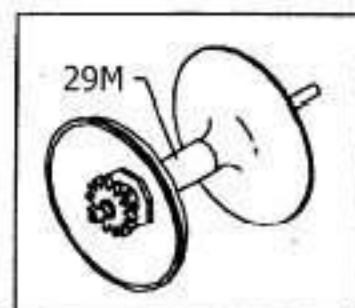

## Penn Reel Parts list for:

## Model: 500 Jigmaster

| KEY NO. | PART NO.  | DESCRIPTION              | KEY NO.                              | PART NO.   | DESCRIPTION                        |
|---------|-----------|--------------------------|--------------------------------------|------------|------------------------------------|
| 1       | 1-500     | RIGHT SIDE PLATE (BLACK) | 27                                   | 27-500     | LEFT SIDE PLATE (BLACK)            |
| 2       | 2-250     | LEFT SIDE RING           | 28                                   | 28-250     | L.S. RING (INNER)                  |
| 3       | 3-500S**  | BRIDGE W/ SLEEVE         | 29L                                  | 29L-500    | SPOOL                              |
| 4       | 4-60      | FIBER WASHER             | 29M                                  | 29M-250    | SPOOL (optional)                   |
| 5       | 5-500     | MAIN GEAR                | 30                                   | 30-200     | STAND                              |
| 6       | 6-309     | DRAG WASHER (3 REQ.)     | 31                                   | 31-19      | RIGHT SIDE STAND SCREW (2 REQ.)    |
| 7       | 7C-500    | METAL WASHER SET         | 32                                   | 32-16CH    | LEFT SIDE STAND SCREW              |
| 8       | 8-60      | TENSION SPRING           | 33                                   | 33-113     | ROD CLAMP (GRAPHITE)               |
| 9       | 9-60      | SPACING SLEEVE           | *                                    | 33R-200    | METAL RINGED ROD CLAMP (OPTIONAL)  |
| 10      | 10-505*** | STAR DRAG WHEEL          | 34                                   | 34-45      | CLAMP SCREW                        |
| 11      | 11-99     | ECCENTRIC JACK           | 34C                                  | 34C-45     | ROD CLAMP SCREW W/ NUTS F/GRAPHITE |
| 12      | 12-500    | PINION YOKE              | 35                                   | 35-60      | CLICK TONGUE                       |
| 13      | 13-500    | PINION                   | 36                                   | 36-60CH    | CLICK BUTTON                       |
| 14      | 14-500    | DOG SPRING               | 37                                   | 37-155     | POSTS (OPTIONAL - 4 REQ.)          |
| 15      | 15-500    | DOG                      | CAN USE TWO 37'S IN PLACE OF ONE 37A |            |                                    |
| 16      | 16-60CH   | LOWER BRIDGE SCREW       | 37A                                  | 37A-500S   | SPACER BAR (2 REQ.)                |
| 17      | 17-60CH   | UPPER BRIDGE SCREW       | 38                                   | 38-7       | R.S. SPACER SCREW (4 REQ.)         |
| 18      | 18-60     | CLUTCH SPRING            | 39                                   | 39-5       | J.S. SPACER SCREW (4 REQ.)         |
| 19      | 19-250    | ECCENTRIC                | 40                                   | 40-60      | LEFT SIDE BEARING                  |
| 20      | 20-60L    | ECCENTRIC SPRING         | 41                                   | 41-60      | BEARING SPRING                     |
| 21      | 21-66     | ECCENTRIC LEVER          | 42                                   | 129-200    | TAKE APART THUMB SCREW             |
| 22      | 22-99     | ECCENTRIC SCREW          | 62                                   | 62-309     | CLICK SPRING                       |
| 23      | 23-60     | HANDLE SCREW             | 63                                   | 63-209     | CLICK SPRING SCREW                 |
| 23A     | 110-60    | HANDLE LOCK SCREW        | 98                                   | 98-505**** | GEAR SLEEVE                        |
| 24      | 24-66     | HANDLE                   | 149                                  | 149-45     | CLAMP NUT (2 REQ.) F/GRAPHITE      |
| 26      | 26-155    | RIGHT SIDE BEARING       | 149A                                 | 149-200    | HEX NUT (2 REQ.) EITHER CLAMP      |
|         |           |                          | *                                    | 152-200    | WINGED NUT F/METAL CLAMP           |

\* Not Shown

\*\* Fine tooth sleeve, older reels take a 3-500 with a coarse tooth sleeve

\*\*\* Fine tooth star drag, older reels take a 10-60 or a 10-140 with a coarse thread

\*\*\*\* Fine tooth gear sleeve, older reels take a 98-60 with a coarse thread